


**AMT1614**  
**0 - 20GHz Digital Attenuator Chip**

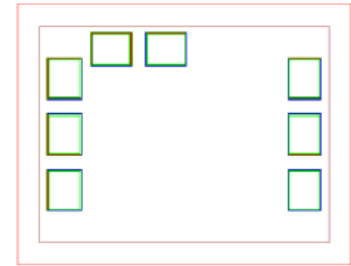

**Key Features :**

- Frequency range : 0 – 20GHz
- Insertion loss : 1.2dB
- Attenuation : 10dB
- Input/output standing wave : 1.3/1.3
- Control method : TTL
- Chip dimensions : 0.9mm x 0.7mm x 0.1mm
- Applications : wireless communication, transceiver module, radio telecommunication etc.

**Description :**

AMT1614 is a one-bit 10dB digital control attenuator, it is designed by Gallium Arsenide (GaAs) process. This chip is designed with ground through metal vias on the back technology, it covers a frequency range of 0 ~ 20GHz, typical insertion loss is 1.2dB, it uses TTL control. This chip is for microwave transceiver module, to realize transceiver signal amplitude control function.

**Absolute Maximum Ratings (Ta = 25°C)**


Symbol	Parameter	Value	Remark
Pin	Input Power	25dBm	
Tch	Operating Temperature	-55 ~ +125°C	
Tm	Sintering Temperature	310°C	30s, N <sub>2</sub> protection
Tstg	Storage Temperature	-65 ~ +150°C	

[1] Operation outside any of the Absolute Maximum Ratings may cause permanent device damage.


**Electrical Characteristics (Ta = 25°C)**

Symbol	Parameter	Test Conditions	Value			Unit
			Min	Typical	Max	
IL	Insertion Loss	F : 0 – 20GHz	-	1.2	-	dB
ATT	Attenuation		-	10	-	dB
VSWRin	Input Standing Wave		-	1.3	-	-
VSWRout	Output Standing Wave		-	1.3	-	-

**Chip Dimensions (Unit :  $\mu\text{m}$ )**

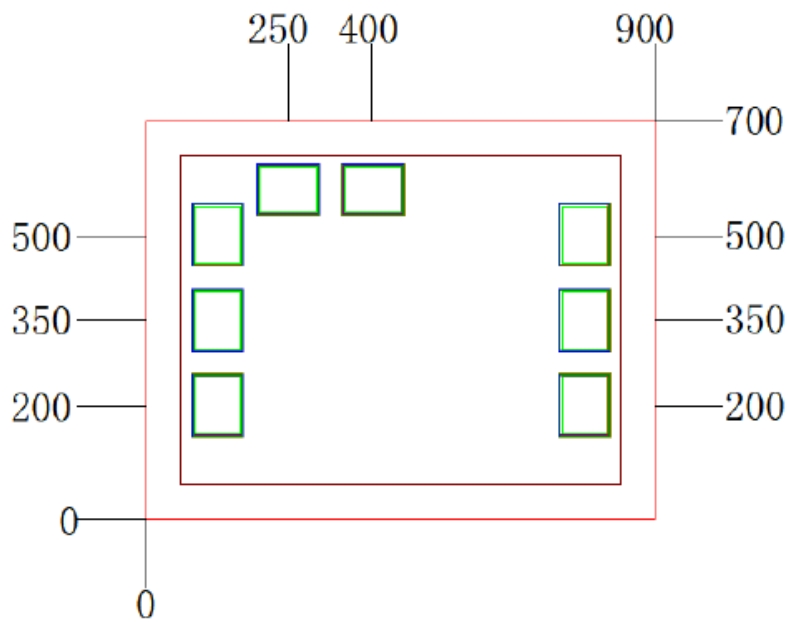

**Chip Layout Diagram**

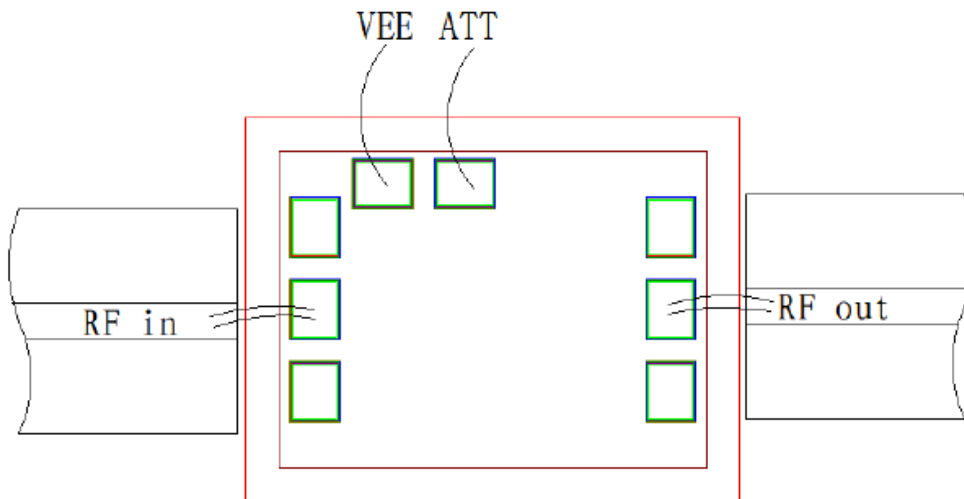

**Pad Definition**

Symbol	Function	Dimension
RFin	RF signal input port, external connect to $50\Omega$ system, no DC blocking capacitor	$80\mu\text{m} \times 100\mu\text{m}$
RFout	RF signal output port, external connect to $50\Omega$ system, no DC blocking capacitor	$80\mu\text{m} \times 100\mu\text{m}$
VSS	-5V power supply	$80\mu\text{m} \times 100\mu\text{m}$
ATT	When input high level, attenuator works at attenuating state	$80\mu\text{m} \times 100\mu\text{m}$

Please see Appendix A for details.